

## Gaseous Fuels

### Single-Plate Gate Valves



#### Application

- Gas pipe systems
- Gas and oil lines
- According to Pressure Equipment Directive 97/23/EC, inspected by and registered with DIN-DVGW


Nominal diameter: 50 – 600  
Operating pressure: 25 – 100 bar  
Operating temperature: -10 °C to +70 °C

#### Technical Data

Valve body: S355J2G3  
Spindle seal: Due to Quad-ring of NBR  
Seal: Primary metal seal,  
secondary seal by o-ring  
Actuator: Without operating controls

### KÜHME-PSA ELI® Type SIL

---

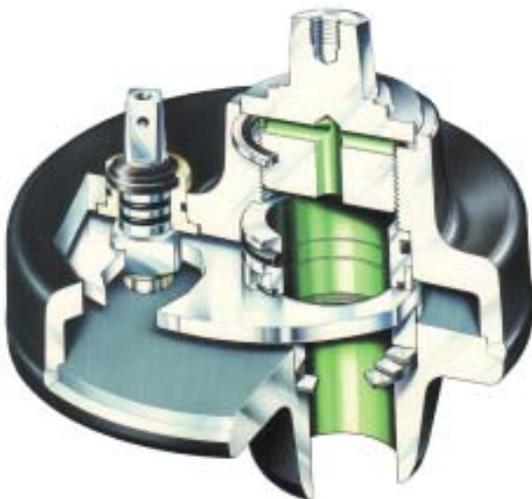

#### Application

- Gas exhaust lines
- According to Pressure Equipment Directive 97/23/EC inspected by and registered with DIN-DVGW

Nominal diameter: 25 – 50  
Operating pressure: 16 – 100 bar  
Operating temperature: -10 °C to +70 °C

#### Technical Data

Valve body: C22G1  
Seal: FPM  
Actuator: VKT safety screw plug under end protector

### KÜHME-PSA DELI®D Type SK